## 2022 - YMA-PS11 Door Upgrade Proposal: 11342-1-0

June 24, 2022



### **Presented To:**

### **Yonkers Public Schools**

John Carr

### **Presented By:**

ERIC MICELI P: (914) 719-7272 eric.miceli@itglarson.com

### ITG Larson, Inc.

155 Lafayette Ave White Plains, NY 10603 P: (914) 719-7272

Nationally recognized as a leader in the security industry Licensed by the N.Y.S Department of State #1000316923

ITG Larson, Inc. is pleased to provide the following proposal. Based on your input and evaluation of your project needs, we have prepared a scope of services detailing this project.

The proposed solution represents a versatile, flexible and we believe the proposed solution offers a costeffective method of satisfying your initial requirements, which can be expanded to accommodate future needs.

ITG Larson, Inc. at your service to provide clarification, or further explanation as needed

This proposal pricing is based on OGS Pricing Group 77201 Award 23150.

Thank you for the opportunity to work with you.

## **TABLE OF CONTENTS**

Project DescriptionProject Description	3
Project Budget	
Financial Summary and Acceptance	
Terms & Conditions	
Project Acceptance	20




Yonkers Public Schools 160 Woodlawn Ave Yonkers, NY 10704


**Scope of Services** 

## 1<sup>ST</sup> Floor Pool Main Entrance Lobby – Inside Vestibule


Replace/Upgrade Existing Exit Panic Device and install Exit Panic Device with key to keep door unlocked/locked manually (non-electrified)

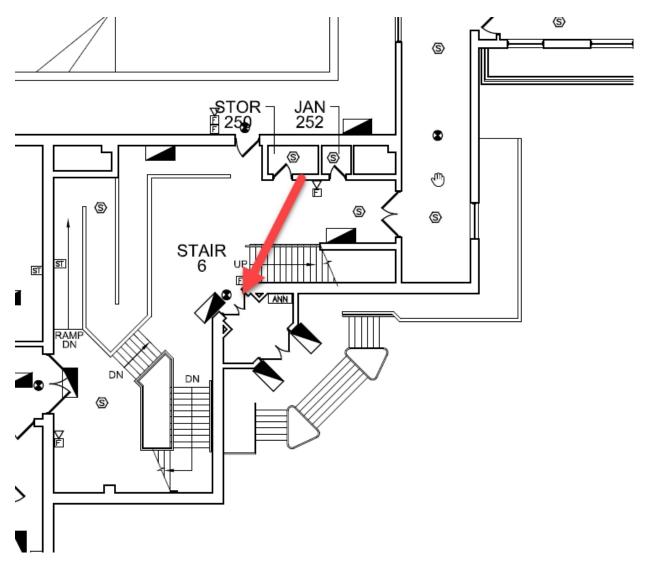



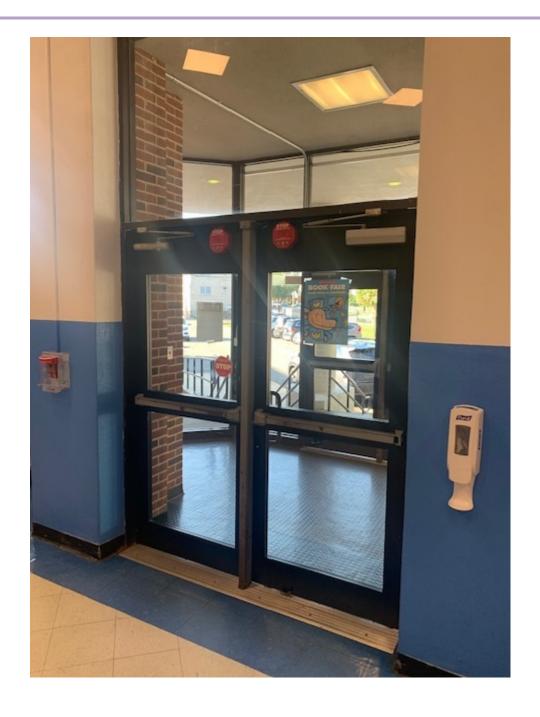




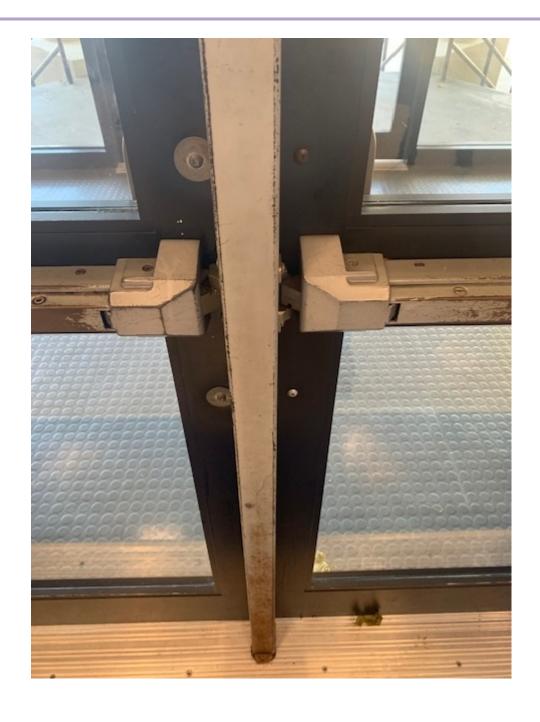

## 1<sup>ST</sup> Floor Pool Main Entrance Lobby Exterior Door

Replace crash bar



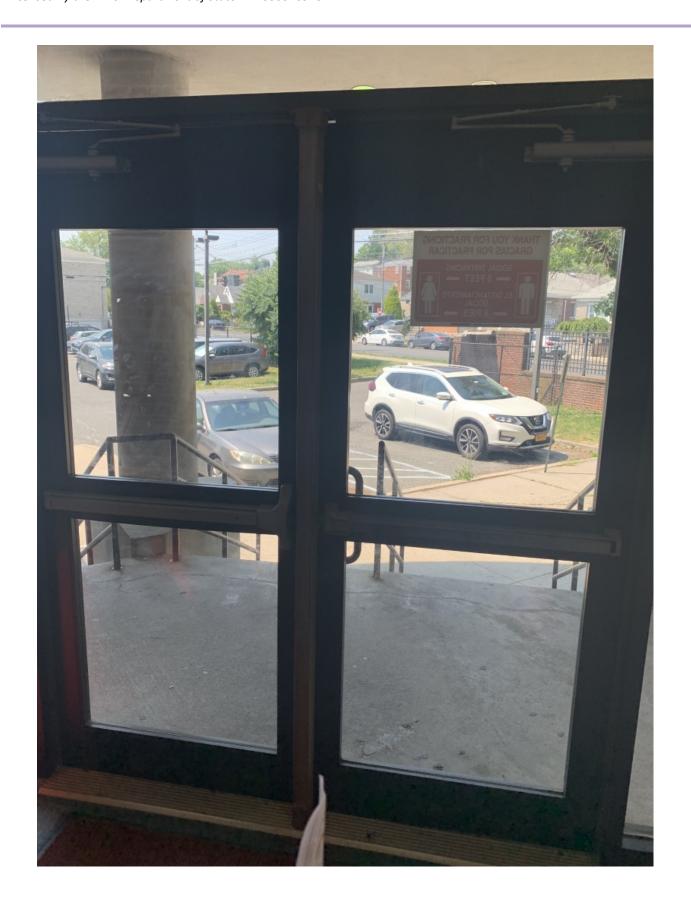




## 1<sup>ST</sup> FL Lobby to Hallway

**Possibly Replace Door** 


Install Card, Double Door Contact, Request to Exit and Electrified Locking Hardware Install Exit Panic Device from hallway to lobby

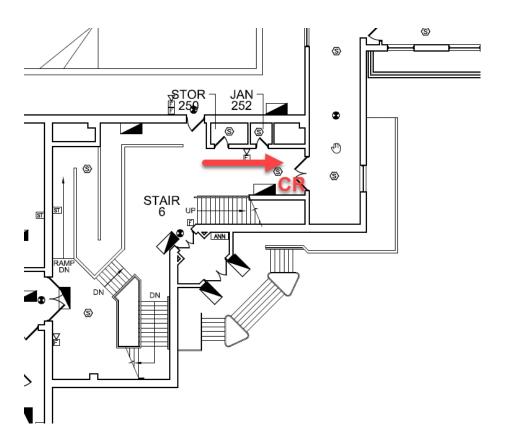








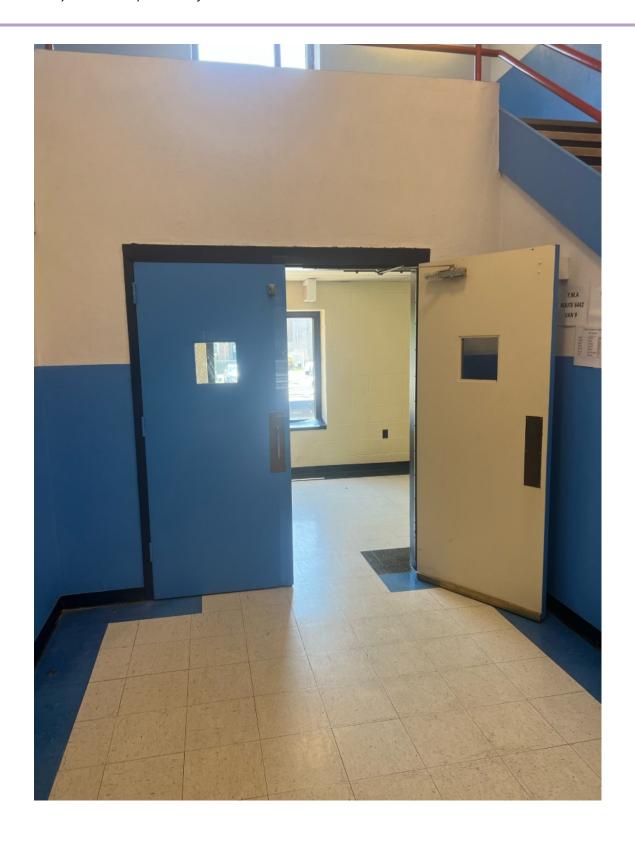




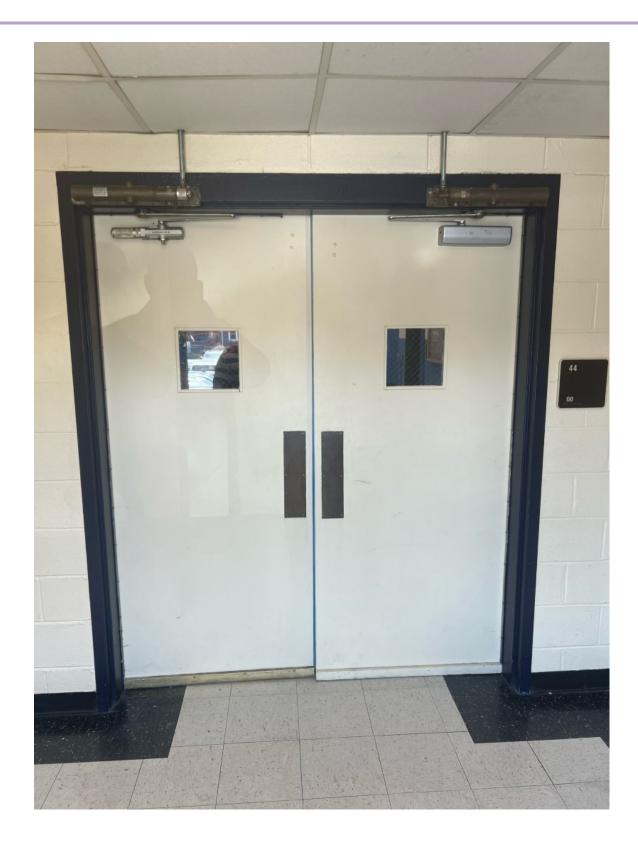




## 2<sup>ND</sup> Floor Pool Balcony Entrance

Install Card Reader, Request Exit, Electrified Hardware, Double Contacts, Exit Panic Device

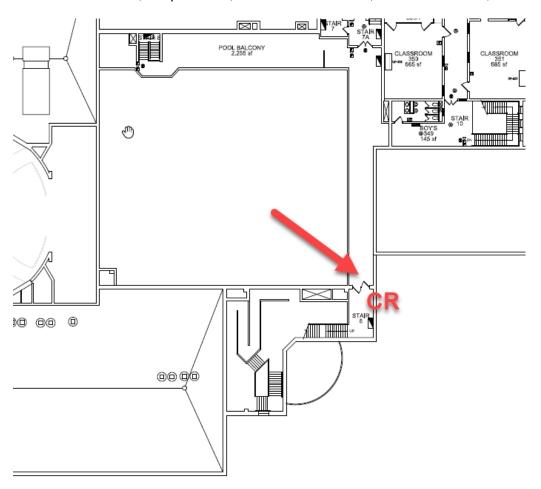




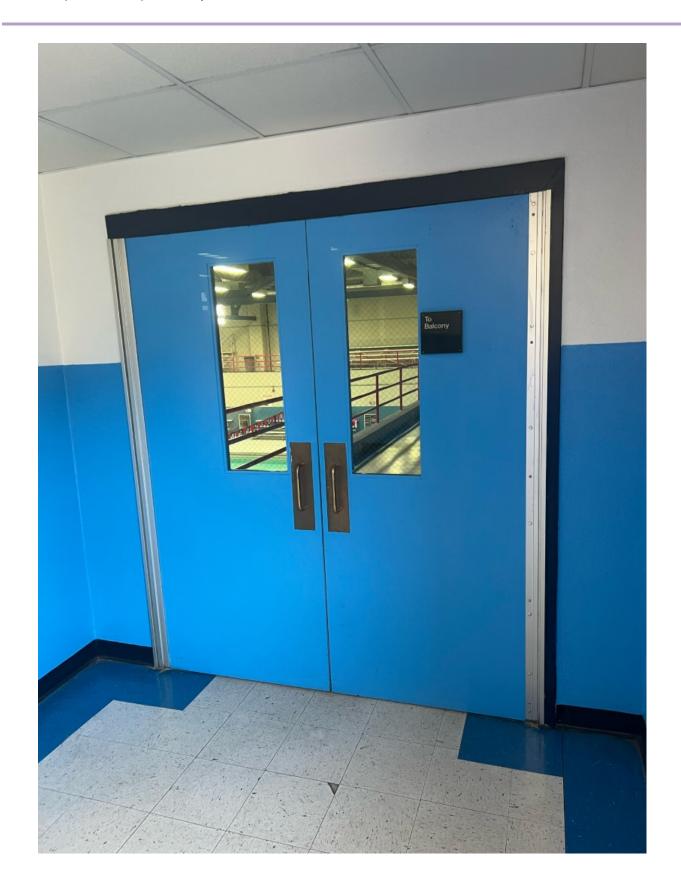





#### **Basement Stairs**

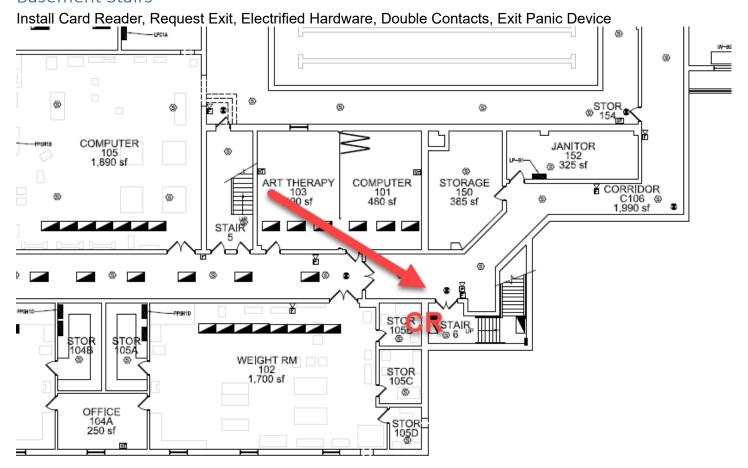



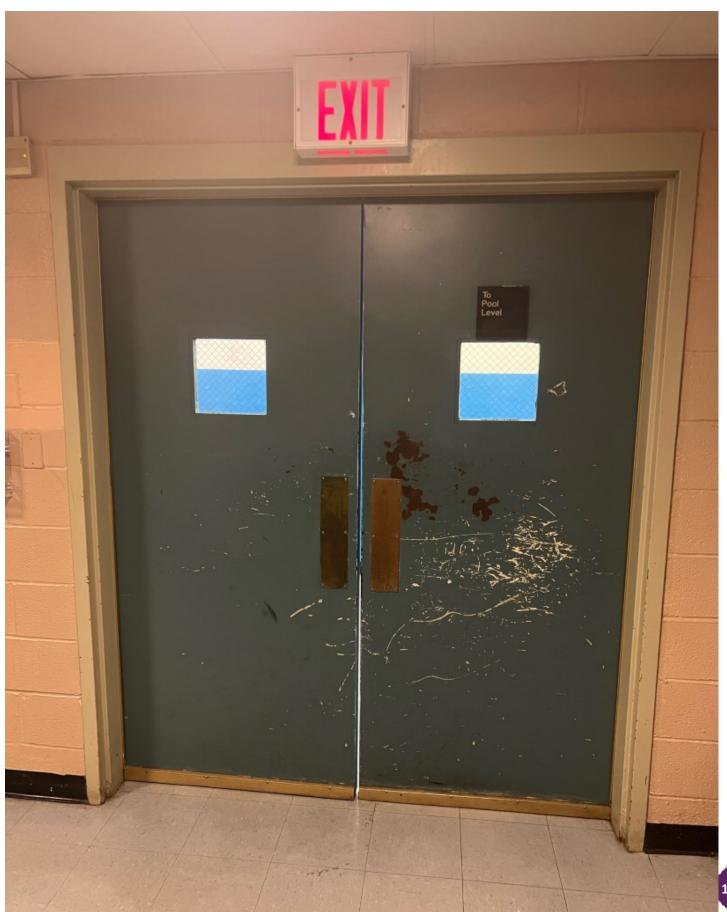


Licensed By the N.Y.S. Department of State # 12000316923

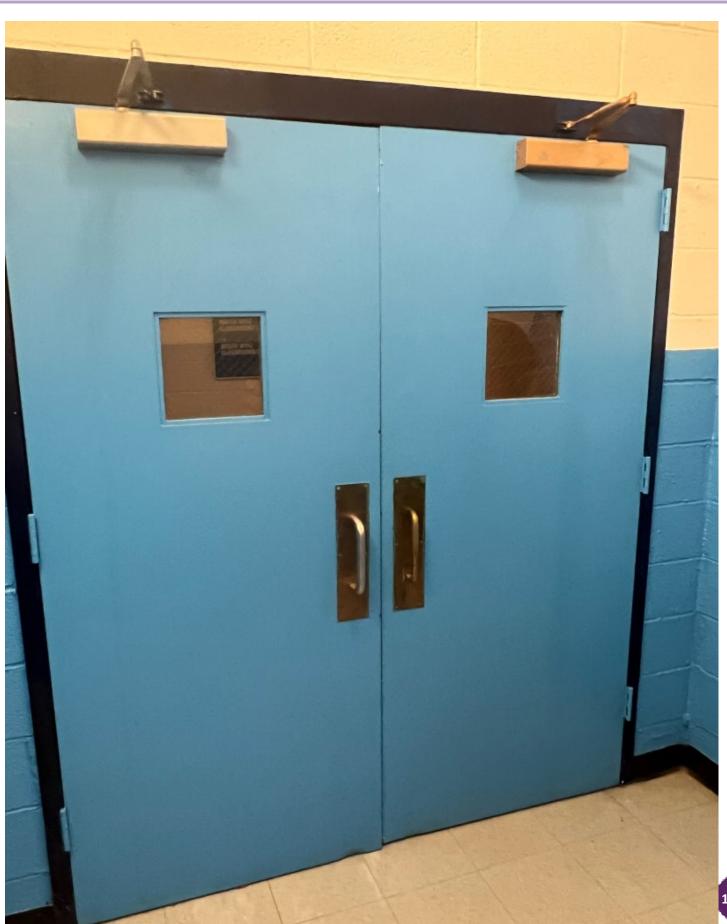



## 1<sup>ST</sup> FL Corridor C207 2 Double Doors

Install 2 Double Door Contacts at both doors

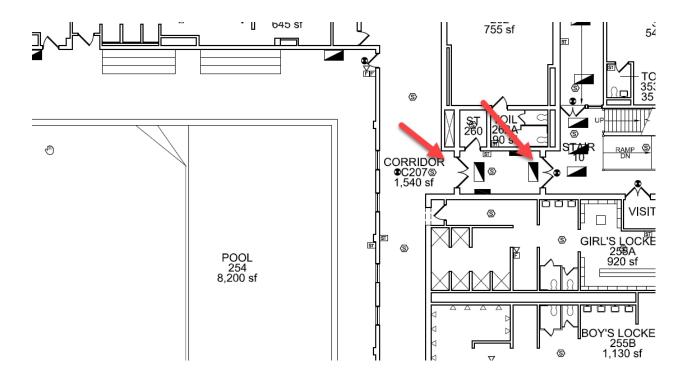

### **PROJECT BUDGET**

Parts					
QTY	Manufacturer	Part #	Description	Unit Price	Ext.Price
2	Remee	MO-C.A.C. CABLE	TYPE M PINK plenum	\$869.25	\$1,738.50
3	Software House	SCR-SE-920P	HID multiCLASS RP40 SE	\$207.00	\$621.00
			Single Gang Reader, Black (920PTNNEK00000)		
3	Software House	SWH-TREX-XL2	T.REX Exit Detector	\$79.20	\$237.60
			w/Tamper, Piezo, Timer,		
			and 2 Relays. White		
8	Bosch	ISN-CTC75-W	3/4" CONTACT WITH	\$24.82	\$198.56
			TERMINAL CONNECTION		
			WHITE		
Labor:					
QTY Description					
6 Region 3 WC -Offsite Integration and Maintenance Technician					
48 Region 3 WC -Installation - CCTV Surveillance Camera Systems Physical Acces					
Subcontractor	s:	_			
Description					Ext.Price
LOCKSMITH - JJ S	ECURITY				\$25,970.00

# **Investment Summary**

Total Equipment \$2,795.66
Total Labor \$34,307.60
Total Proposal Amount \$37,103.26

Note: The above price does not include tax Proposal is valid for 60 days.

## **Clarifications & Assumptions**

Subject	Include /	/ Exclude	Subject	Include /	Exclude
AutoCAD Plans & Drawing Files		Ø	Stub Ups & Back Boxes	$\square$	
Submittals	$\square$		Back Boxes		
Permits		$\square$	Conduit	$\overline{\mathbf{Z}}$	
System Training		$\square$	Wiring	$\overline{\mathbf{v}}$	
Network Cabling & Infrastructure	$\square$		Fire Stopping	$\square$	
Telephone Line		$\square$	Patch & Touch-up Paint		
120vac Power		$\square$	Door/Frame Preparation		
Locking Hardware	$\square$		Construction Equipment		$\square$
Trim Devices			Lift/Bucket Truck		$\square$

- This proposal is based on a fixed rate contract and not on a time and material contract.
- ITG labor is provided during normal business hours Monday Friday from 8:30 AM -5PM excluding holidays unless specified.
- Overtime is not included and will be charged additionally.
- ITG will broom sweep floors and dispose of ITG created trash daily within job site provided containers.
- Taxes may be charged accordingly
- Elevator time is included per the hours required in the specification only.
- Deliveries will be made during normal business hours. Overtime delivery is not included.
- Final testing and system delivery are included as per the project schedule only.
- This Proposal is valid for 60 days
- One Year warranty included warranty on individual parts and services prior to project completion date may begin when system is considered in a state beneficial use

### **Terms & Conditions**

	iis & conditions					
1.	ITG LARSON, Inc. (hereinafter referred to as "ITG" or electronic security system consisting of the equipmen					
2.	DESCRIPTION OF EQUIPMENT AND SERVICES:  ☐ Monitoring Center Services ☐ Repair Service ☐ Access Control Administration ☐ Alarm Signal Verif ☐ Cyber Security: Compliant Encryption ☐ Other: (See Attached Schedule of Equipment and S	☐ Thermal Imaging	☐ Remote Subscriber Access☐ Guard Response Device	☐ Cameras ☐ Self-Monitoring	☐ Access Control	
Prop	oosal Acceptance					
022	- YMA-PS11 Door Upgrade					
Yonkers Public Schools			ITG Larson, Inc.			
-	Authorized Signature		Authorized Signature			
F	Printed Name		Printed Name			